



## 371scfm (175psig) Rigsafe Air Compressor c/w Aftercooler

A single-stage, oil-injected compressor that provides a free air delivery of 10.5 m<sup>3</sup>/min (371 cfm) at a normal effective working pressure of 12 bar.

### Features

- > DNV 2.7-1 offshore crash frame & approved lifting sling & shackles c/w Talurit swaged ferrules
- > Bunded (plugged) base
- > Aftercooler c/w water separator
- > Spark Arrestor
- > Chalwyn Valve
- > Steel Braided Fuel Lines
- > Emergency Stop Button
- > Battery Isolator
- > Battery Start

### Options

- > Pressure Reducing Valve

Performance	
Actual Free Air:	371cfm (10.5m <sup>3</sup> /min)
Working Pressure:	175psi (12bar)
Weights & Dimensions	
Overall Dimensions:	3,480 x 1,900 x 2,344mm / 11ft 5" x 6ft 2" x 7ft 8"
Weight:	4,600kg / 10,141lbs

All dimensions and weights are accurate at the time of creation.


Please check exact specifications of units when ordering as dims and tare weights are of the most recent additions to the rental fleet.

OEG Offshore  
e: sales@oegoffshore.com



FIRST CHOICE FOR SPECIALIST  
DNV CABINS, SPECIALIST MODULES,  
CONTAINERS AND BASKETS

www.oegoffshore.com

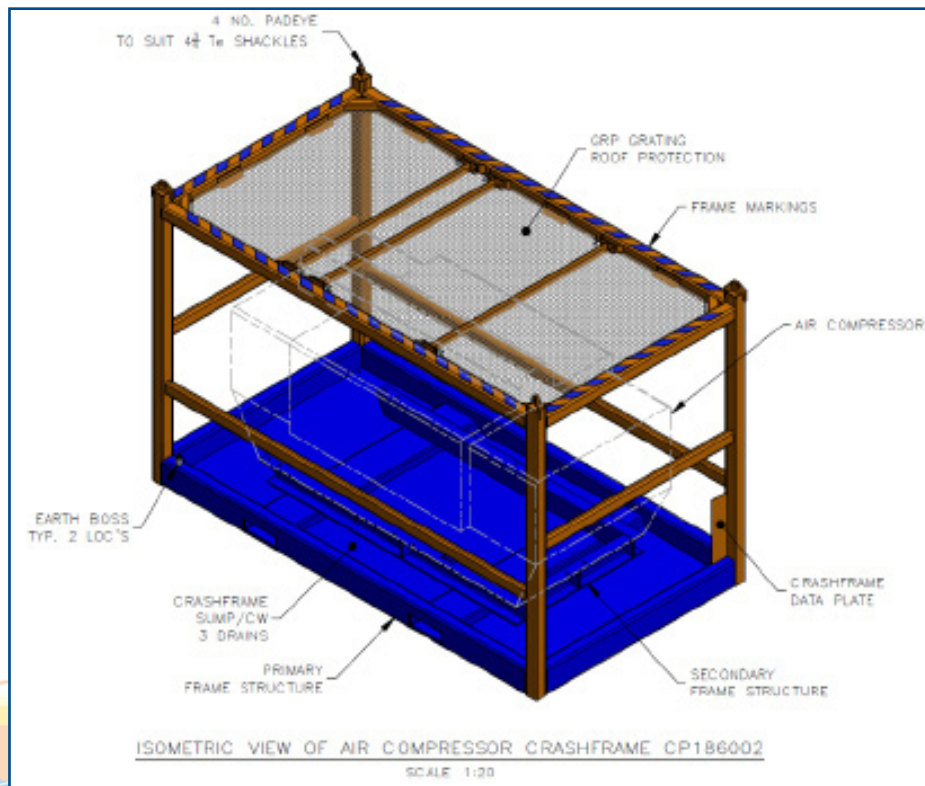

Engine Data	
Make / Model:	Intercooled 4 cylinder Deutz engine / XAHS 186 C3
Output at Rated Speed:	104 Kw
Engine Speed (nominal):	2,200rpm
Oil Capacity:	10.5 Ltrs
Fuel Tank Capacity:	175 Ltrs
Max Working Ranges:	-25 °C to +50 °C

E. & O.E.

All dimensions and weights are accurate at the time of creation.

Please check exact specifications of units when ordering as dims and tare weights are of the most recent additions to the rental fleet.



OEG Offshore  
e: sales@oegoffshore.com



FIRST CHOICE FOR SPECIALIST  
DNV CABINS, SPECIALIST MODULES,  
CONTAINERS AND BASKETS

www.oegoffshore.com