

# A60 Zone 2 Hazardous Area Workspace Modules




## RENTAL AND SALE - WORKSPACE MODULES

Choose from our versatile range of high quality, ready-to-go, DNV 2.7-1 / EN 12079 and DNV 2.7-2 (where applicable) workspace modules with their superior levels of safety and comfort. Developed specifically to satisfy oil & gas, marine and renewable energy industry requirements, our high specification modules have a wide range of applications.

The design team has carefully considered industry needs; safety, security, comfort, footprint space, weight and hook-up capability for rig and vessel managers, transportation and lifting requirements for the carriers and the overall value for money. Our workspace modules are all A60 fire rated and zone 2 hazardous area certified, and can be configured to suit your requirements, be it as an office, laboratory, ROV cabin or coffee shack etc. We also have available modules to NORSOK standards.

Equipment supplied meets the specific requirements of the latest international standards & approvals:  
DNV 2.7-1 / EN 12079 or  
ISO 10855, SEPco, API, DOT,  
CFR, ASME VIII DIV 1., IMDG,  
ADR/RID & UK CAA CAP 43.

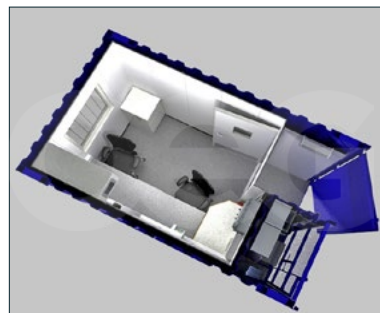

# A60 Zone 2 Hazardous Area Workspace Modules



## KEY FEATURES

- Workspace module sizes available for sale and rental: 4m / 4.5m / 4.8m / 6m
- A60 fire rated
- ATEX Zone 2 Hazardous area certified to II 3 G EEx v3 IIB T3
- User selectable 380V/415V/440V/460V/480V, (50Hz or 60Hz), 3 phase & earth main power supply
- Nominal load current 13A per phase @ 380V
- Suggested vessel protection, 63A motor rated circuit breaker
- 30m of main power supply cabling supplied with the module
- Integral Heating, Ventilation and Air Conditioning (HVAC) system
- Combined pressurisation, fire & gas protection system
- Fully automatic fire and gas detection & shutdown system
- Manual alarm call point
- Emergency stop push-button, (within external service recess)
- 3-hour battery-backed emergency lighting
- 2 x hazardous area certified Public Address I General Alarm loud speakers, 100V line, adjustable output power between 2W and 8W
- Hazardous area certified telephone
- RJ45 CAT5 or CAT6 data points
- 110V and 230V sockets
- DNV 2.7-1 certified slings and shackles provided with every module
- Internal fit out to suit customer requirements
- Available from stock



Office Workspace Module

The module provides a variety of volt-free signal contacts which the vessel can incorporate into their own alarm system. These are single pole changeover, which may be configured for fail-safe, or non-fail-safe operation.

- Low gas alarm
- High gas alarm
- Fire/smoke alarm
- Fire/Gas common fault
- Non-Ex equipment shutdown
- Supply fire damper open
- Supply fire damper closed
- Exhaust fire damper open
- Exhaust fire damper closed

## TECHNICAL SPECIFICATION

SIZE / TYPE	EXTERNAL DIMENSIONS	TARE WEIGHT	PAYLOAD	MAX. GROSS WEIGHT
4m (13ft) Offshore Workspace Module	4,070mm x 2,438mm x 2,896mm 13' 4" x 8" x 9' 5"	6,500 kg 14,330 lbs	1,000 kg 2,204 lbs	7,500 kg 16,534 lbs
4.5m (15ft) Offshore Workspace Module	4,540mm x 2,438mm x 2,896mm 14' 10" x 8" x 9' 5"	7,000 kg 15,432 lbs	1,000 kg 2,204 lbs	8,000 kg 17,636 lbs
4.8m (16ft) Offshore Workspace Module	4,876mm x 2,438mm x 2,896mm 15' 11" x 8" x 9' 5"	7,000 kg 15,432 lbs	1,000 kg 2,204 lbs	8,000 kg 17,636 lbs
6m (20ft) Offshore Workspace Module	6,058mm x 2,438mm x 2,896mm 19' 10" x 8" x 9' 5"	8,000 kg 17,636 lbs	1,000 kg 2,204 lbs	9,000 kg 19,841 lbs

First Choice in Offshore Cargo Carrying Units, Compactors and Modules worldwide for Sale and Rental



sales@oegoffshore.com  
www.oegoffshore.com